


AOR 12 PIN PLUG LEGEND V1		
Pin Position NO.	Circuit Description	Conductor Color
1	Left-Hand Turn Signal	Yellow
2		
3	Earth Return	White
4	Right-Hand Signal	Green
5	Service Brakes	Blue
6	Stop Lamps	Red
7	Clearance Lamps, Side Lamps and Rear Lamps	Brown
8		
9	Break Safe Monitor Wire Optional	Purple
10		
11		
12	** REDARC/SAT Dish Ignition Switch Wire	Black

\*\* 12V Ignition or ACC switched positive feed required for use with REDARC BCDC charger fitted in Van to switch relay. Vans fitted with REDARC BMS 1230S2 chargers, may need lower voltage sensing if vehicle has a variable voltage alternator. It is also necessary for vans fitted with satellite dish systems for triggering the automatic retraction safety feature. Please contact AOR for more information.

**Front View**

**12 Pin Plug  
(Connected to Harness)**

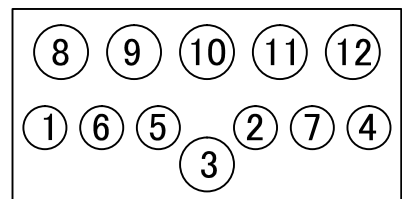

**12 Pin Socket  
(Connected to Vehicle)**

